

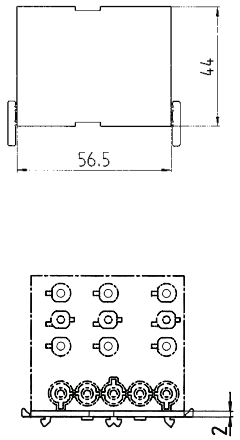


Distribution block			Distribution block		Mounting plate	
			5/3 pole with locking device. Through-wiring for three-phase current; 5 pole male and female connectors; two outgoing single phase circuits for each phase. (see DIN VDE 0100 part 430 section 9.2 for protection of the neutral conductor – by making the load distribution as symmetrical as possible, excessive loading of the neutral conductor can be avoided).		5 pole with locking device 1 input, 5 pole male connector 3 outputs, 5 pole female connector	
			for distribution block 5 pole; 5/3 pole for panel mounting (see “Accessories” for mounting plate)			
Application	Coding	Color	Part No.	Std. Pack	Part No.	Std. Pack
Distribution blocks						
						
						
Mains with ground	Code 1 	black (on request) white	92.050.0153.1	100	92.050.0353.1	60
Dimming L, N, PE, +, -	Code 2 	pastel blue				
Type			GST 18i5V37A1 V		GST 18i5V3P1 V	
Note: see “Accessories” for mounting plate						