# Datasheet

Art.No. 92.050.0353.1

## Distributor GST18I5V 3P1 V SW

Distribution block GST18i5, 5 pole, 1 input and 3 outputs 5 pole, 250/400 V, 20 A, colour of coding: black



| | |
|---|---|
| Art.No. | 92.050.0353.1 |
| EAN | 4015573381681 |
| Order unit | 60 pieces |

## Approvals

## Technical data

### General

| | |
|---|---|
| Rated current | 20 A |
| Rated voltage | 400 V |
| Rated impulse voltage | 4 kV |
| Pollution degree | 2 |
| Mechanical coding | Code 1 |
| Interlockable | Yes |
| Color of coding/ contact carrier | Black |
| Marking of poles | |

### Model

| | |
|---|---|
| Number of poles | 5 |
| Number of poles 2 | 3 |
| Number of inputs | 1 |
| Number of outputs | 3 |
| Type of fastening | No |
| Degree of protection (IP) | IP40 |
| Type of distributor | Distribution terminal block |

### Material


| | |
|---|---|
| Housing material | Polyamide |
| Halogen free | Yes |
| Contact material | CuZn |


| | |
|---|---|
| Insulation components continous temperature | 100 °C |
| Surface finish | Silver-plated |


## Dimensions

| | |
|---|---|
| Length | 44 mm |
| Width | 55 mm |
| Height | 39 mm |

Drawings

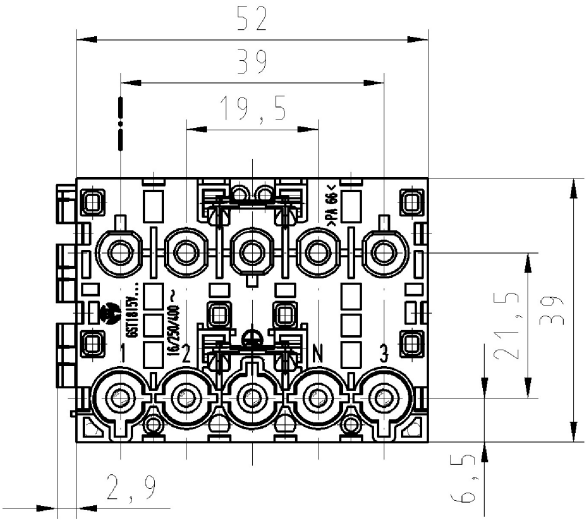

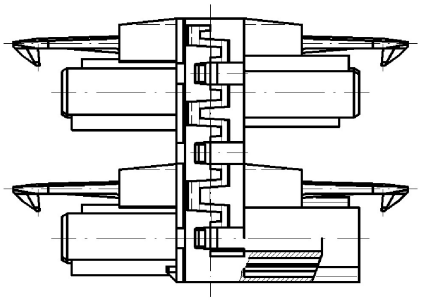

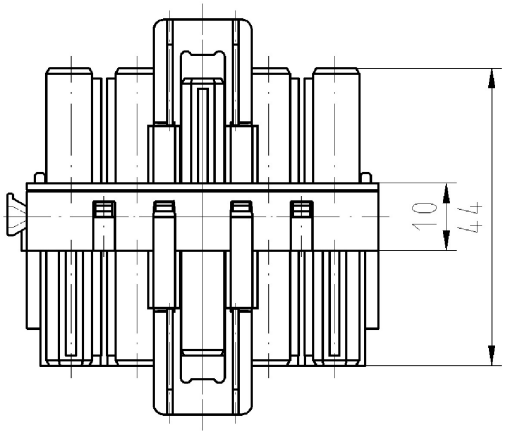
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
M.t./E gekennzeichnete Maße sind nur für interne Zwecke gültig

Weitere Daten siehe Katalog
further data see catalog

| Teile - Nr.<br>part-no. | Farbe<br>colour | Typ<br>type |
|---|---|---|
| 92.050.0353.0 | weiß<br>white | GST18I5V 3P1 V WS |
| 92.050.0353.1 | schwarz<br>black | GST18I5V 3P1 V SW |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Freitoleranz nach DIN - | | CAD - Zeichnung, keine manuellen Änderungen | | | 1.Verwendung: - | Bl.: 1 von 1 | |
| / | Maßstab | | 2004 | Tag | Name | Zeichnung Nr. | Index |
| / | % | | Entworfen | 08.12. | Treschan | T 92.050.0353.0 01K | |
| / | | | Geprüft | - | - | | |



DW028 treschan 2004-12-10T10:20:58 1.000